



AFX MIXING AND PUMPING
TECHNOLOGIES INC.




A DIVISION OF AFX HOLDINGS

KEEPING FLUID IN MOTION

AFX Mixing and Pumping Technologies Inc. (AFX) is known as one of the world's leading manufacturers of agitators and mixers. Complimenting their portfolio is one of the world's largest ranges of peristaltic hose pumps, with nine different pump models offering flow rates up to approximately 150m³/hr (650 USGPM) and handling some of the toughest applications across a wide range of industries.



PUMPS




Simple in design – Simple in operation

Building upon the already well proven peristaltic pumping concept, AFX have brought a fresh new approach to the world of peristaltic pumping. Combining the benefits of compression rollers in peristaltic tube pumps with lubricated compression shoes in peristaltic hose pumps, significant operational cost saving benefits have been achieved.

Maintenance times have been significantly reduced due to simple and practical design concepts, with whole life cost of ownership in mind.

Operating principle

The pumping action results from alternately compressing and relaxing a specially designed machined hose between the pump housing and the pump compression rollers. The fluid is pushed along the hose towards the discharge by the compression rollers, whilst the reopening hose behind the roller draws more fluid into the pump. With 100% hose closure at all times, there is no internal slip. This ensures excellent metering accuracy and pressure delivery. With no seals or valves, abrasive and particle-laden slurries are handled with ease. The inner wall of the hose is the only part in contact with the pumped fluid making it ideal for aggressive fluids.

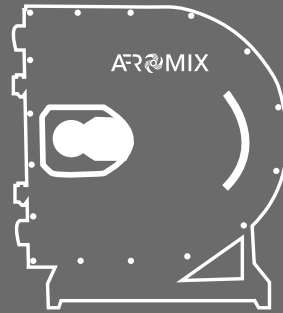

Cost benefits

- Pumps abrasive slurries, corrosive material, solids and gaseous liquids with ease
- Ideal for high viscosity or shear sensitive products
- Pumps can run-dry indefinitely without damage
- No check valves or seal water flush systems
- Fully reversible – pumps in either direction
- Minimal maintenance – the hose is the only wearing part
- Pump casings available in a choice of materials including stainless steel
- Suction lift capability up to 9.5 metres and self-priming
- Highly accurate

Applications

→ Chemical

Corrosive acids and shear sensitive medias

→ Water and Waste Treatment

Sludge pumping and chemical transfer and dosing

→ Fishing industry

Bulk transfer, ship unloading and effluent handling

→ Paint and pigments

Dispersion mill feed, pigment and latex transfer

→ Pulp and Paper

Dyes, sizing agents, and titanium dioxide

→ Mining

Underflow pumping, tailing slurries, sludges and reagents

→ Ceramics

Clay slip and glazes

→ Construction

Cements, coatings, spray concrete, colorants and aggregate

→ Print and Packaging


Inks, coatings and adhesives

→ Food and Drink

Yeast cropping, fillings, sauces, flavourings, additives and effluents


→ OEM

Bespoke manufactured units designed for integration into other equipment

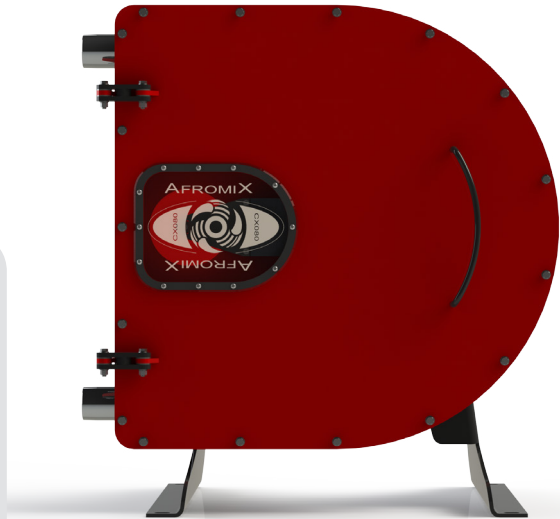


Pump selection

We attach the same care and dedication not only to pump and hose design, but also to the selection and application of our pumps. To ensure consistent and repeatable success, application engineers have access to our in-house developed software for accurate pump selection. Developed in conjunction with some of the industry's leading experts, considerable practical experiences, coupled with time established fluid mathematics, the software considers all the relevant system and fluid characteristics, allowing our engineers to make pump selections with confidence.

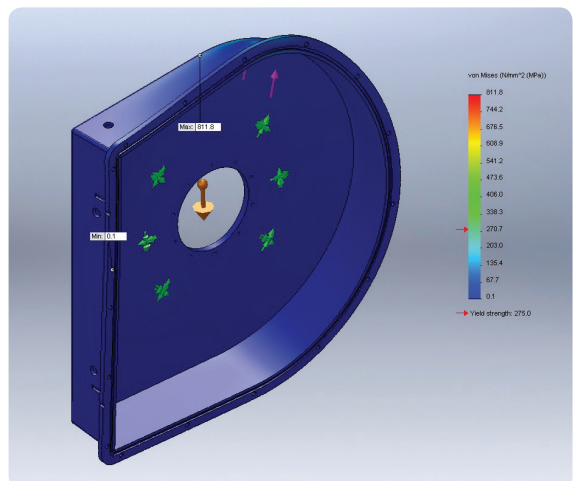

Design and function: our pumps are designed using finite element analysis and go through robust physical testing.

HOSES



The 'heart' of the pump


A carefully designed and manufactured hose element is the single most vital component for the performance, durability, and efficiency of any peristaltic hose pump.

To ensure a good pump you must have a good hose, and this is where AFX excels.

Each hose we supply is built under stringent quality control measures, using high quality, compounded rubbers, reinforced with four individual layers of braided nylon carefully set at optimum angles. Once cured, the outer diameter of each hose is precision machined to exacting tolerances ensuring a perfectly sized hose.

An accurately sized hose ensures perfect compression, which eliminates internal slip (which reduces pump efficiency and allows for the abrasive slurries to prematurely destroy the hose).

Designed and manufactured to perfection

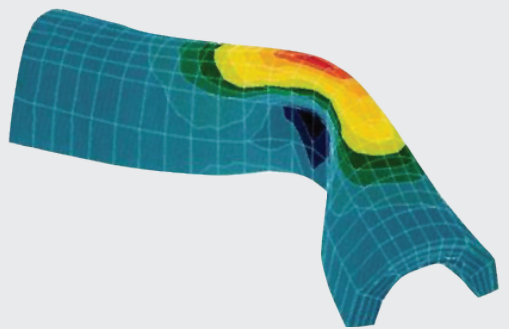

Our hoses undergo stringent tests to ensure perfection

Utilising design tools such as finite element analysis (FEA), backed up by physical tests and theoretical calculations, our hoses are designed to perfection – right down to the position of the reinforcing layers, the braid angles, cord thickness, and the thickness of the surrounding rubber.

The roller geometry and the profile of the pump housing are all designed and engineered to optimise the performance of the pump hose.

To ensure a good repeatable and consistent hose life, you must have a hose built and machined to exacting tolerances. To us the ISO standards are not good enough. All our hoses exceed the requirements set out in ISO 1307 and DIN7715.



Available hose liner materials

➔ Natural Rubber (NR)

A general purpose material with excellent mechanical and abrasion resistant properties. Suitable for all water-based applications and mild acids, alkalis or oxidising agents.

Max. fluid temperature: 80 °C

Min. temperature: -20 °C

➔ Nitrile (NBR)

Acrylonitrile butadiene rubber. A durable material resistant to oils, greases, alkalis and detergents. Compliant to European BfR standards, this liner can also be used in a wide range of applications in the food industry.

Max. fluid temperature: 80 °C

Min. temperature: -10 °C

➔ EPDM

Ethylene propylene diene rubber. Excellent chemical resistance, especially to ketones, esters, alcohols and concentrated acids.

Max. fluid temperature: 90 °C

Min. temperature: -10 °C


➔ CSM (Hypalon®)

Chlorosulphonyl polyethylene rubber. Excellent chemical resistance to high concentration acids, ozones, and other oxidising materials.

Max. fluid temperature: 80 °C

Min. temperature: -10 °C

The anatomy of our hose

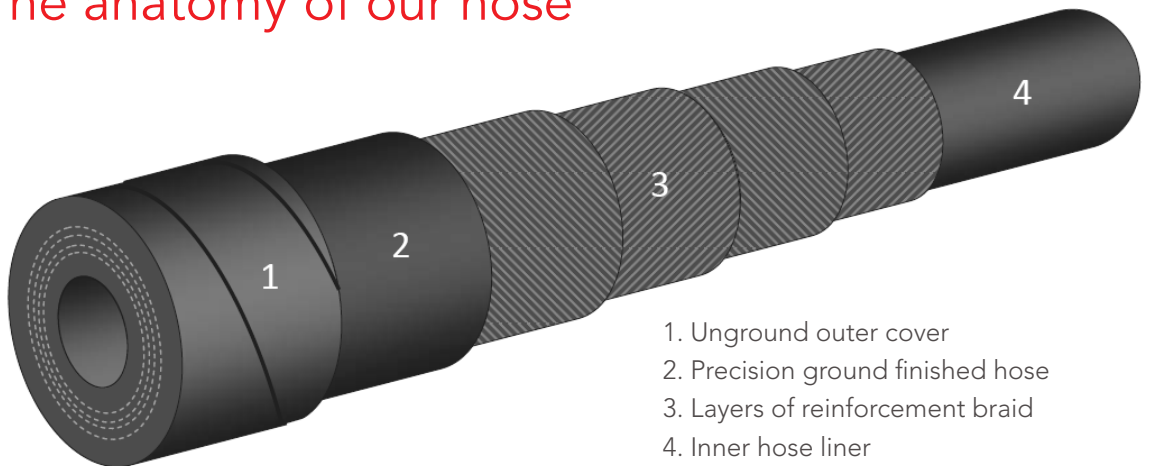

1. Unground outer cover
2. Precision ground finished hose
3. Layers of reinforcement braid
4. Inner hose liner

Hoses for use in other manufacturers' pumps

So confident are we of the quality of our hose, we will supply hoses, produced to original tolerances, for a number of the major peristaltic pump manufacturers pumps. We have successfully reduced operational costs for a large number of customers by using our hose in their existing peristaltic hose pumps. Call us for further details.

OPTIONS AND ACCESSORIES

As a company we pride ourselves in offering our customers solutions, not just products. Where required we can supply ancillary equipment to complement our core products. As a manufacturer with a flexible 'can do' approach, we can undertake many forms of customisation and bespoke manufacture. Feel free to call us on any pump related query.

Some of the commonly used accessories supplied with our pumps include:

➔ Suction and discharge pulsations dampeners

Peristaltic pumps are by nature inherently pulsing in operation. Excessive pressure spikes and pulsations within the pump system can be extremely damaging to the pump hose and the process system.

Appropriate pump selection will ensure pulsations are kept to an acceptable level. In certain circumstances where other constraints exist, it is possible to fit appropriate pulsation dampening equipment.

Correctly sized pulsation dampeners and inlet stabilisers can:

- ➔ eliminate up to 90% of pressure spikes
- ➔ protect pump, pipeline and instrumentation
- ➔ reduce vibration, hammer and noise
- ➔ maintain pump efficiency and hose life

Specific details and recommendations are dependent upon the application. Please enquire for further details.

➔ Hose failure detection

Pump hose failure is inevitable. When a hose fails it is dependent upon many factors and may not be when someone is watching the pump ready to switch it off. Installing a Hose Failure Detector is a simple solution. When a pump hose fails, pumped product is contained within the pump housing mixing with the hose lubricant and raising the liquid level within the pump housing. The Hose Failure Detector will sense this rise in liquid level activating a contact relay, switching the pump off.



THREE KEY ADVANTAGES

1. For a given flow rate our pumps run slower than most competitive pumps, resulting in longer life and reduced time between failures.
2. Slower speed also results in reduced energy consumption.
3. Studies show that the costs of replacing a regular pump with our peristaltic hose pump, could be recovered in less than two months of daily use!



Contact us

Tel: +1 604 380 4458
Email: contact@afxmixing.com
Website: www.afxmixing.com

AFX Head Office

13782, 232a
Street Maple Ridge,
BC, Canada
V4R 0C2